

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



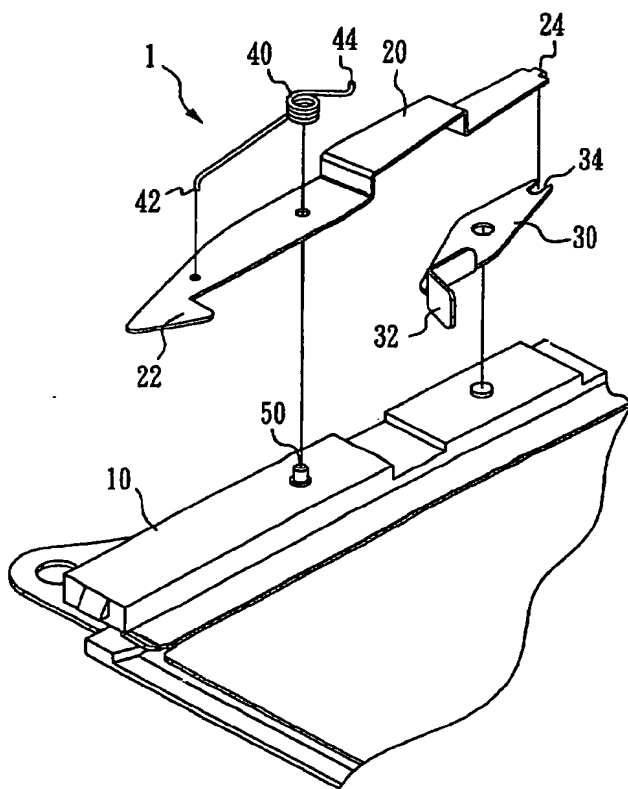
(43) International Publication Date
1 April 2004 (01.04.2004)

PCT

(10) International Publication Number
WO 2004/027699 A1

- (51) International Patent Classification⁷: **G06K 13/06**, 7/01
- (21) International Application Number: **PCT/SG2003/000227**
- (22) International Filing Date:
20 September 2003 (20.09.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
091121605 20 September 2002 (20.09.2002) TW
- (71) Applicant (for all designated States except US): **FCI ASIA TECHNOLOGY PTE LTD [SG/SG]**; 10 Hoe Chiang Road, #18-00 Keppel Towers, Singapore 089315 (SG).
- (72) Inventors; and
(75) Inventors/Applicants (for US only): **CHEN, Arthur** [—/—]; No. 19, Hou-Hu, Hu-Pei Village, Lin-Kou Town, Taipei (TW). **TAI, Kenny** [—/—]; 5F, No. 35, Jia-Shan Street, Chung-Li City, Taoyuan Hsien (TW). **JUANG, Arueng** [—/—]; No.21, Alley 3, Lane 42, Hsing-Yu Street, Ping-Chen City, Taoyuan Hsien (TW). **CHEN, Benny** [—/—]; No.2, Ci-Guang Street, Da-Xi Town, Taoyuan Hsien (TW).
- (74) Agent: **ELLA CHEONG MIRANDAH & SPRUSONS PTE LTD**; Robinson Road Post Office, P.O. Box 1531, Singapore 903031 (SG).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,

[Continued on next page]

(54) Title: ANTI-MISINSERTION MECHANISM OF CARD CONNECTOR

(57) Abstract: Disclosed is an anti-misinsertion mechanism for a card connector defining a correct card thickness, the mechanism comprising: a body; a first link generally extending along the body, the first link including an actuator for actuating the first link to be rotated from a normal position toward an operating position upon detecting existence of the correct thickness of a partially-inserted card; and a second link provided with a stopper for selectively preventing full insertion of the card, the second link being pivoted to the body and operatively connected to the first link, thereby being rotatable between a normal position and an operating position relative to the normal and operating positions of the first link.